

# LISA<sup>®</sup> 25

## CHROMED



Functioning:	<input checked="" type="checkbox"/> <b>HOT WATER</b>	<input checked="" type="checkbox"/> <b>DUAL ENERGY</b> <small>(for dual energy kit see Cordivari Radiators and Towel Rails catalogue)</small>
--------------	--	--

<b>Max pressure:</b> 8 bar	<b>Max temperature:</b> 110 °C	<b>Connections:</b> 2 x 1/2" gas- 1 da 1/2" gas for airvent
----------------------------	--------------------------------	---

### Material:

- Vertical collectors in mild steel semi oval 30x40 mm.
- Horizontal heating elements in mild steel ø 25 mm.

### Fixing kit:

The fixing kit is in compliance with norm VDI 6036 Class 1-2-3-4 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, Airvent, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



### Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

### Finishing:

Chrome (PLATED IN ITALY)

## ACCESSORIES

*For accessories range see accessories chapter*



CHROMED VALVE  
KIT

For information about Kristal valves, see radiators and towel rails catalogue.



KIT 2 HOOKS  
CHROMED


Art. nr. 5991990310303




TOWEL BAR  
CHROMED  
Width= 370 mm

Art. nr. 5991990310302

Applicable only for width ≥ 450 mm



Detail of the 50 mm  
Pipe Centres version

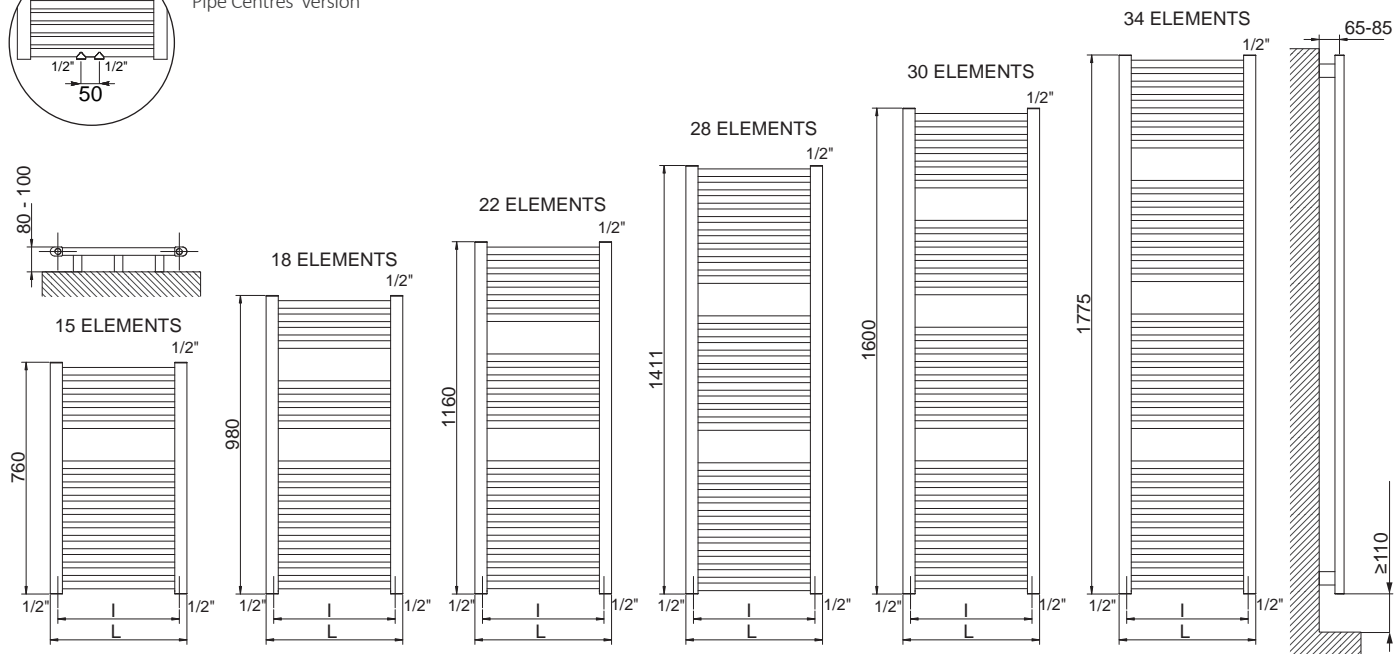

TOWEL RAILS

## LISA® 25 CHROMED

				PIPE CENTRES 50 MM							Dual energy kit
Height [mm]	Width L [mm]	Pipe Centres l [mm]	Art. nr.	Art. nr.		Dry weight [kg]	Surface [m²]	Water content [lt]	Δt=50°C [Watt]	Exponent [n]	[Watt]
760	450	400	3551586110202	3551586110252		5,6	0,62	3,7	232	1,2235	--
	500	450	3551586110203	3551586110253		6,0	0,68	4,0	254	1,2218	300
	550	500	3551586110204	3551586110254		6,4	0,74	4,3	275	1,2204	300
	600	550	3551586110205	3551586110255		6,9	0,80	4,6	296	1,2192	300
980	450	400	3551586110209	3551586110259		6,8	0,77	4,6	285	1,2116	300
	500	450	3551586110210	3551586110260		7,4	0,84	4,9	313	1,2156	300
	550	500	3551586110211	3551586110261		7,9	0,91	5,3	340	1,2133	400
	600	550	3551586110212	3551586110262		8,4	0,98	5,7	367	1,2087	400
1160	450	400	3551586110216	3551586110266		8,2	0,93	5,5	330	1,2448	400
	500	450	3551586110217	3551586110267		8,9	1,02	6,0	362	1,2427	400
	550	500	3551586110218	3551586110268		9,5	1,10	6,4	394	1,2410	400
	600	550	3551586110219	3551586110269		10,2	1,19	6,9	426	1,2378	500
1411	450	400	3551586110223	3551586110273		10,2	1,69	6,9	397	1,2666	500
	500	450	3551586110224	3551586110274		11,1	1,27	7,5	436	1,2595	500
	550	500	3551586110225	3551586110275		11,9	1,38	8,1	475	1,2592	600
	600	550	3551586110226	3551586110276		12,7	1,49	8,6	513	1,2537	600
1600	450	400	3551586110230	3551586110280		11,2	1,27	7,6	451	1,2699	500
	500	450	3551586110231	3551586110281		12,1	1,39	8,2	495	1,2660	600
	550	500	3551586110232	3551586110282		13,0	1,51	8,8	539	1,2628	600
	600	550	3551586110233	3551586110283		13,9	1,63	9,4	582	1,2600	700
1775	450	400	3551586110237	3551586110287		12,6	1,43	8,5	505	1,2209	600
	500	450	3551586110238	3551586110288		13,6	1,57	9,2	553	1,2128	600
	550	500	3551586110239	3551586110289		14,6	1,71	9,9	601	1,2107	700
	600	550	3551586110240	3551586110290		15,6	1,83	10,6	649	1,2089	700

For output at different Δt than 50°C, please refer to the following formula: **desired output = output at Δt 50°C x (desired Δt/50)<sup>n</sup>**