

# LISA<sup>®</sup> 22



RADIATORS, CONVECTORS AND  
CEILING-MOUNTED RADIANT  
PANELS, HOT WATER HEATING,  
FAN ASSISTED AND MIXED



Functioning:	<input checked="" type="checkbox"/> <b>HOT WATER</b>	<input checked="" type="checkbox"/> <b>ELECTRIC</b>	<input checked="" type="checkbox"/> <b>DUAL ENERGY</b> <small>(for dual energy kit see Cordivari Radiators and Towel Rails catalogue)</small>
--------------	--	---	--

<b>Max pressure:</b> 8 bar	<b>Max temperature:</b> 110 °C	<b>Connections:</b> 2 x 1/2" gas- 1 da 1/2" gas for airvent
----------------------------	--------------------------------	---

## Material:

- Vertical collectors in painted mild steel semi oval 30x40 mm
- Horizontal heating elements in painted mild steel ø 22 mm

## Fixing kit:

The fixing kit is in compliance with norm VDI 6036 Class 1-2-3-4 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, Airvent, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



## Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

## Painting process:

Painted with ecological epoxy powders. (Certificate DIN 55900-1,-2).

## Colour:

Pure white RAL 9010

## ACCESSORIES

*For accessories range see accessories chapter*



KRISTAL VALVES -  
WHITE COLOUR

For information about Kristal valves, see radiators and towel rails catalogue.



KIT 2 HOOKS WHITE  
COLOUR


Art. nr. 5991990310171




TOWEL BAR  
WHITE COLOUR  
Width= 370 mm

Art. nr. 5991990310170

Applicable only for width ≥ 450 mm



Detail of the 50 mm  
Pipe Centres version

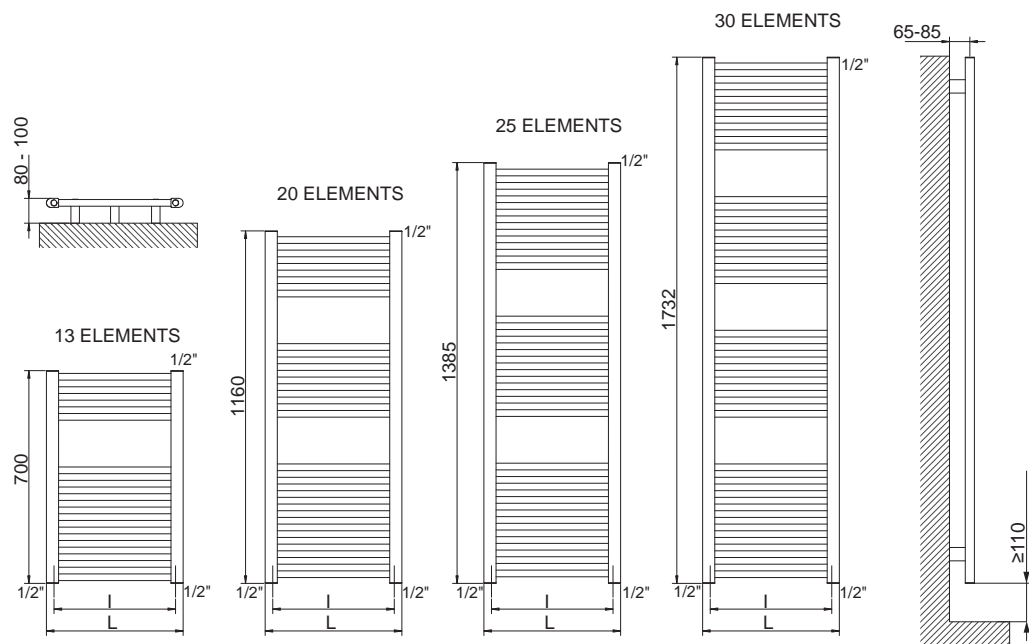

TOWEL RAILS

## LISA® 22

			STANDARD PIPE CENTRES	PIPE CENTRES 50 MM	Colour PURE WHITE R01-RAL 9010.					Dual energy kit
Height [mm]	Width L [mm]	Pipe Centres I [mm]	Art. nr.	Art. nr.	Dry weight [kg]	Surface [m <sup>2</sup> ]	Water content [lt]	Δt=50°C [Watt]	Exponent [n]	[Watt]
700	400	350	3551646101077	3551646101081	3,8	0,46	2,6	257	1,22270	300
	450	400	3551646101001	3551646101021	4,0	5,10	2,9	282	1,22320	300
	500	450	3551646101002	3551646101022	4,3	0,55	3,1	306	1,22371	300
	550	500	3551646101003	3551646101023	4,6	0,60	3,3	330	1,22421	400
	600	550	3551646101004	3551646101024	4,9	0,64	3,5	355	1,22472	400
1160	750	700	3551646101133	3551646101137	5,7	0,75	4,1	427	1,22623	500
	400	350	3551646101078	3551646101082	6,0	0,73	4,2	408	1,23621	500
	450	400	3551646101005	3551646101025	6,4	0,80	4,5	448	1,23736	500
	500	450	3551646101006	3551646101026	6,8	0,87	4,9	487	1,23852	600
	550	500	3551646101007	3551646101027	7,2	0,94	5,2	526	1,23967	600
1385	600	550	3551646101008	3551646101028	7,6	1,01	5,5	565	1,24082	700
	750	700	3551646101134	3551646101138	8,9	1,18	6,5	683	1,24428	700
	400	350	3551646101079	3551646101083	7,3	0,90	5,2	509	1,22627	600
	450	400	3551646101009	3551646101029	7,8	0,99	5,6	558	1,22868	600
	500	450	3551646101010	3551646101030	8,3	1,07	6,0	606	1,23108	700
1732	550	500	3551646101011	3551646101031	8,8	1,16	6,4	655	1,23349	700
	600	550	3551646101012	3551646101032	9,3	1,25	6,8	703	1,23589	700
	750	700	3551646101135	3551646101139	10,9	1,45	8,0	849	1,24311	900
	400	350	3551646101080	3551646101084	8,9	1,10	6,3	634	1,25108	700
	450	400	3551646101013	3551646101033	9,5	1,20	6,8	695	1,24984	700
1732	500	450	3551646101014	3551646101034	10,1	1,31	7,3	756	1,24860	900
	550	500	3551646101015	3551646101035	10,8	1,41	7,8	817	1,24736	900
	600	550	3551646101016	3551646101036	11,4	1,51	8,3	878	1,24613	900
	750	700	3551646101136	3551646101140	13,3	1,76	9,8	1062	1,24241	1200

For output at different Δt than 50°C, please refer to the following formula: **desired output = output at Δt 50°C x (desired Δt/50)<sup>1,4</sup>**

## PROMOTION PACKAGES (STANDARD PIPE CENTRES)

Height [mm]	Width [mm]	Art. nr.	Art. nr.	Height [mm]	Width [mm]	Art. nr.	Art. nr.
700	500	3551646101002 <b>05</b>	3551646101002 <b>10</b>	1385	450	3551646101009 <b>05</b>	3551646101009 <b>10</b>
1160	450	3551646101005 <b>05</b>	3551646101005 <b>10</b>	1385	500	3551646101010 <b>05</b>	3551646101010 <b>10</b>
1160	500	3551646101006 <b>05</b>	3551646101006 <b>10</b>	1385	550	3551646101011 <b>05</b>	3551646101011 <b>10</b>
1160	550	3551646101007 <b>05</b>	3551646101007 <b>10</b>	1732	500	3551646101014 <b>05</b>	3551646101014 <b>10</b>
				1732	550	3551646101015 <b>05</b>	3551646101015 <b>10</b>
				1732	600	3551646101016 <b>05</b>	3551646101016 <b>10</b>