

LISA[®] 22

CHROMED



Functioning:	<input checked="" type="checkbox"/> HOT WATER	<input checked="" type="checkbox"/> ELECTRIC	<input checked="" type="checkbox"/> DUAL ENERGY <small>(for dual energy kit see Cordivari Radiators and Towel Rails catalogue)</small>
--------------	--	---	--

Max pressure: 8 bar	Max temperature: 110 °C	Connections: 2 x 1/2" gas- 1 da 1/2" gas for airvent
----------------------------	--------------------------------	---

Material:

- Vertical collectors in mild steel semi oval 30x40 mm
- Horizontal heating elements in mild steel ø 22 mm

Fixing kit:

The fixing kit is in compliance with norm VDI 6036 Class 1-2-3-4 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, Airvent, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

Finishing:

Chrome (PLATED IN ITALY)

ACCESSORIES

For accessories range see accessories chapter



CHROMED VALVE
KIT

For information about Kristal valves, see radiators and towel rails catalogue.




TOWEL BAR
CHROMED
Width= 370 mm

Art. nr. 5991990310302
Applicable only for width ≥ 450 mm




KIT 2 HOOKS
CHROMED

Art. nr. 5991990310303



Detail of the 50 mm
Pipe Centres version

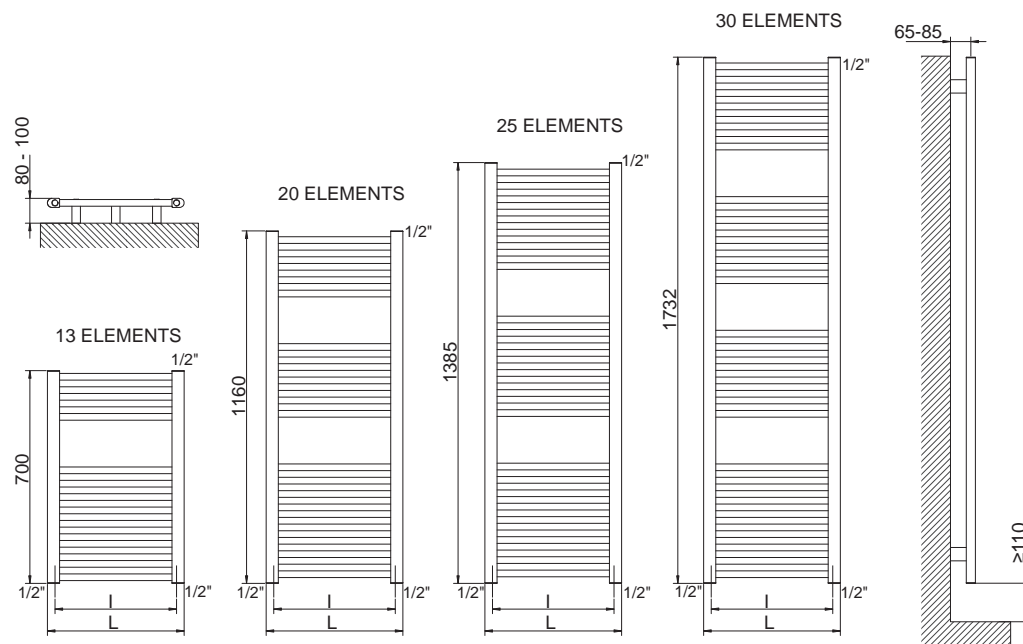

LISA® 22 CHROMED

				PIPE CENTRES 50 MM							Dual energy kit
Height [mm]	Width L [mm]	Pipe Centres l [mm]	Art. nr.	Art. nr.		Dry weight [Kg]	Surface [m2]	Water content [lt]	Δt=50°C [Watt]	Exponent [n]	[Watt]
700	400	350	3551646101277	3551646101281		3,8	0,46	2,6	181	1,24994	--
	450	400	3551646101201	3551646101221		4,0	5,10	2,9	197	1,24795	--
	500	450	3551646101202	3551646101222		4,3	0,55	3,1	213	1,24595	--
	550	500	3551646101203	3551646101223		4,6	0,60	3,3	230	1,24396	--
	600	550	3551646101204	3551646101224		4,9	0,64	3,5	246	1,24196	300
1160	400	350	3551646101278	3551646101282		6,0	0,73	4,2	289	1,25655	300
	450	400	3551646101205	3551646101225		6,4	0,80	4,5	315	1,25689	300
	500	450	3551646101206	3551646101226		6,8	0,87	4,9	340	1,25724	400
	550	500	3551646101207	3551646101227		7,2	0,94	5,2	366	1,25758	400
	600	550	3551646101208	3551646101228		7,6	1,01	5,5	391	1,25792	400
1385	400	350	3551646101279	3551646101283		7,3	0,90	5,2	339	1,25877	400
	450	400	3551646101209	3551646101229		7,8	0,99	5,6	372	1,25745	400
	500	450	3551646101210	3551646101230		8,3	1,07	6,0	406	1,25613	500
	550	500	3551646101211	3551646101231		8,8	1,16	6,4	440	1,25481	500
	600	550	3551646101212	3551646101232		9,3	1,25	6,8	474	1,25350	500
1732	400	350	3551646101280	3551646101284		8,9	1,10	6,3	439	1,25027	500
	450	400	3551646101213	3551646101233		9,5	1,20	6,8	479	1,25195	600
	500	450	3551646101214	3551646101234		10,1	1,31	7,3	519	1,25362	600
	550	500	3551646101215	3551646101235		10,8	1,41	7,8	559	1,25530	700
	600	550	3551646101216	3551646101236		11,4	1,51	8,3	599	1,25697	700

For output at different Δt than 50°C, please refer to the following formula: **desired output = output at Δt 50°C x (desired Δt/50)ⁿ**