

# LISA® 25

## CURVED



#### AVAILABLE FUNCTIONS:

- Hot water
- Dual energy

#### Material:

- Vertical collectors in painted mild steel semi oval 30x40 mm.
- Curved horizontal heating elements in painted mild steel  $\varnothing$  25 mm.

#### Fixing kit:

The fixing kit is in compliance with norm VDI 6036 Class 1-2-3-4 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, Airvent, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



Max pressure: 8 bar

Functioning: hot water

Max temperature: 110° C

Connections: n° 2 x 1/2" G - 1 x 1/2" G

#### Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

#### Painting process:

Painted with ecological epoxy powders. (Certificate DIN 55900-1,-2).

#### Colour:

Pure white RAL 9010

### ACCESSORIES

For Accessories range see Accessories chapter



KRISTAL VALVES  
WHITE COLOUR

For information about Kristal valves, see radiators and towel rails catalogue




KIT 2 HOOKS  
WHITE COLOUR

Art. nr. 5991990310171




MY WAY®  
SYSTEM

For information see RADIATORS and TOWEL RAILS catalogue



Detail of the 50 mm pipe centres version.

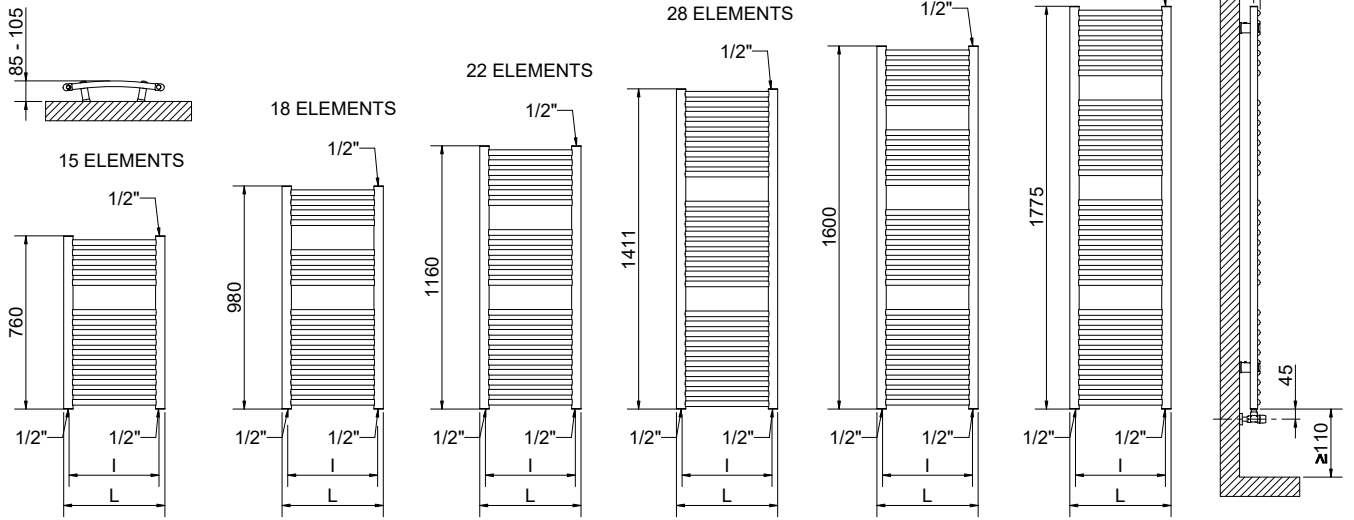

LISA® 25 CURVED

Height [mm]	Width L [mm]	Pipe Centres l [mm]	Art. nr.
760	400	350	3551586100301
	450	396	3551586100302
	500	444	3551586100303
	550	493	3551586100304
	600	546	3551586100305
750	694	3551586100306	
980	400	350	3551586100308
	450	396	3551586100309
	500	444	3551586100310
	550	493	3551586100311
	600	546	3551586100312
750	694	3551586100313	
1160	400	350	3551586100315
	450	396	3551586100316
	500	444	3551586100317
	550	493	3551586100318
	600	546	3551586100319
750	694	3551586100320	
1411	400	350	3551586100322
	450	396	3551586100323
	500	444	3551586100324
	550	493	3551586100325
	600	546	3551586100326
750	694	3551586100327	
1600	400	350	3551586100329
	450	396	3551586100330
	500	444	3551586100331
	550	493	3551586100332
	600	546	3551586100333
750	694	3551586100334	
1775	400	350	3551586100336
	450	396	3551586100337
	500	444	3551586100338
	550	493	3551586100339
	600	546	3551586100340
750	694	3551586100341	

PIPE CENTRES 50 mm

Art. nr.
3551586100351
3551586100352
3551586100353
3551586100354
3551586100355
3551586100356
3551586100358
3551586100359
3551586100360
3551586100361
3551586100362
3551586100363
3551586100365
3551586100366
3551586100367
3551586100368
3551586100369
3551586100370
3551586100372
3551586100373
3551586100374
3551586100375
3551586100376
3551586100377
3551586100379
3551586100380
3551586100381
3551586100382
3551586100383
3551586100384
3551586100386
3551586100387
3551586100388
3551586100389
3551586100390
3551586100391

Colour PURE WHITE R01-RAL 9010

Dry weight [Kg]	Surface [m <sup>2</sup> ]	Water content [lt]	Thermal output [Watt]		Exponent [n]	Dual energy kit [Watt]
			Δt=50°C	Δt=30°C		
5,1	0,57	3,4	317	170	1,2169	300
5,6	0,62	3,7	348	186	1,2179	300
6,0	0,68	4,0	379	203	1,2189	400
6,4	0,74	4,3	410	219	1,2199	400
6,9	0,80	4,6	441	236	1,2208	400
8,2	0,98	5,6	534	285	1,2238	500
6,3	0,70	4,2	388	207	1,2299	400
6,8	0,77	4,6	427	227	1,2298	400
7,4	0,84	4,9	466	248	1,2297	400
7,9	0,91	5,3	505	269	1,2295	500
8,4	0,98	5,7	543	289	1,2294	500
10,0	1,19	6,8	660	352	1,2290	600
7,6	0,84	5,1	449	238	1,2404	400
8,2	0,93	5,5	494	262	1,2393	500
8,9	1,02	6,0	539	286	1,2383	500
9,5	1,10	6,4	585	310	1,2373	600
10,2	1,19	6,9	630	335	1,2362	600
12,1	1,45	8,3	766	408	1,2331	700
9,4	1,00	6,3	541	286	1,2427	500
10,2	1,69	6,9	596	316	1,2420	600
11,1	1,27	7,5	651	345	1,2413	600
11,9	1,38	8,1	706	374	1,2406	700
12,7	1,49	8,6	762	404	1,2399	700
15,2	1,82	10,4	927	492	1,2378	900
10,3	1,60	6,9	615	325	1,2445	600
11,2	1,27	7,6	679	359	1,2440	700
12,1	1,39	8,2	742	393	1,2436	700
13,0	1,51	8,8	805	426	1,2431	700
13,9	1,63	9,4	869	460	1,2427	900
16,5	1,98	11,3	1058	561	1,2414	1000
11,6	1,30	7,8	691	363	1,2591	700
12,6	1,43	8,5	761	400	1,2577	700
13,6	1,57	9,2	832	437	1,2564	700
14,6	1,71	9,9	903	475	1,2550	900
15,6	1,83	10,6	974	513	1,2537	1000
18,6	2,24	12,7	1187	626	1,2496	1200

For output at different Δt than 50°C, please refer to the following formula: **desired output = output at Δt 50°C x (desired Δt/50)<sup>n</sup>**