



LUCY 18_{ELECTRIC}



MATERIAL:

- Vertical collectors in painted mild steel \varnothing 30 mm.
- Horizontal heating elements in painted mild steel \varnothing 18 mm.
- Glycolate water.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4. hollow brick walls, user notice.

PACKAGING:

The radiator is protected by recyclable carton box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders. (Certificate DIN 55900-1,-2)

COLOURS:

Radiator and accessories: standard white colour RAL 9010-R01.
For other colours see Colour chart chapter.

ACCESSORIES:

See Accessories chapter

Electrical only:	<input checked="" type="checkbox"/> With PLUS digital thermostat (800 mm wire lenght - with Schuko plug)	<input checked="" type="checkbox"/> With ECO digital thermostat (1200 mm wire lenght - with Schuko plug)
------------------	--	--


Class protection: CLASS 1	Minimum ingress protection: IP 44	Power supply: 230 V - 50 Hz
---------------------------	-----------------------------------	-----------------------------

Seasonal energy efficiency η_s : 39% with PLUS digital thermostat	Seasonal energy efficiency η_s : 38% with ECO digital thermostat
--	---

CERTIFICATIONS



HOW TO PLACE ELECTRIC RADIATORS

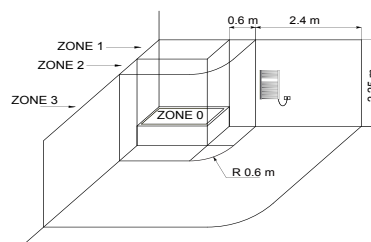

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage.

The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.

INCLUDED



Remote control of PLUS digital chrono-thermostat

Remote control of PLUS digital chrono-thermostat functioning

ACCESSORIES



Kit 2 hooks painted mild steel - white R01

Art. nr. 5991990310388





Towel bar painted mild steel-white R01

Art. nr. 5991990331126

If ordered separately from the radiator, the accessories are available in standard white only.

Accessories and spare parts - see Accessories chapter

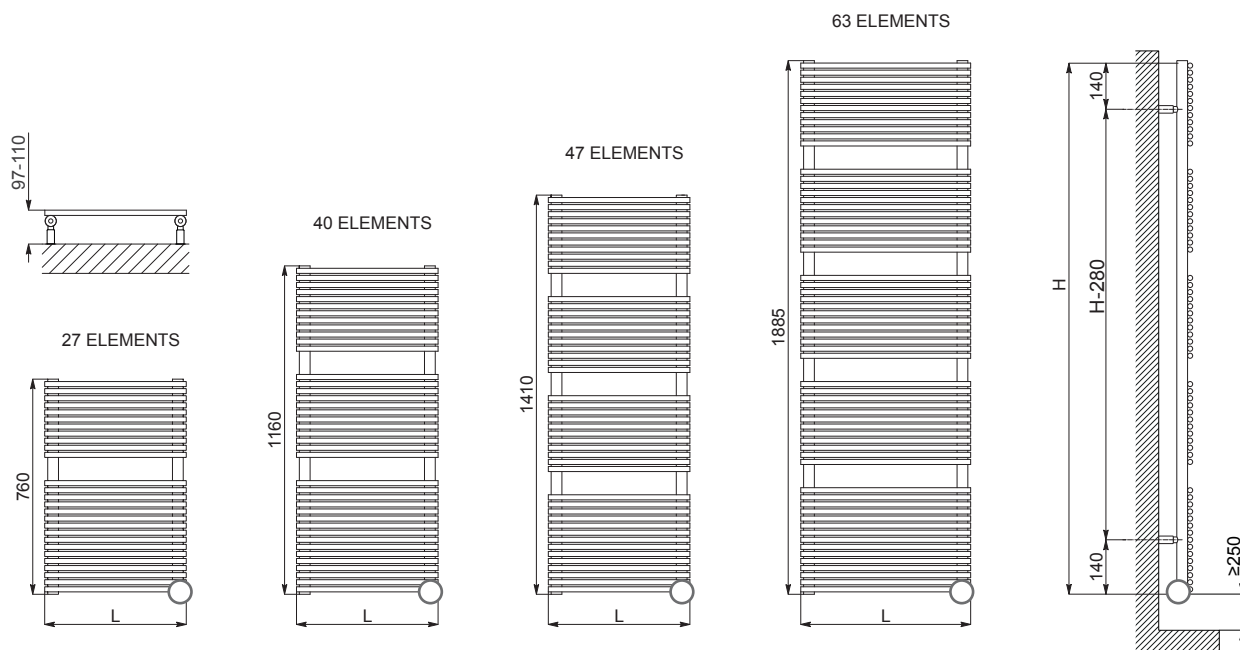


The general footprint has to be calculated considering the thermostat height

LUCY 18 ELECTRIC (remote control included)

Height [mm]	WIDTH L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
760	480	3581406100240	500	14
1160	480	3581406100241	700	22
1410	480	3581406100242	900	26
1885	480	3581406100243	1200	30

Technical specification of thermostat see Accessories chapter



The general footprint has to be calculated considering the thermostat height

LUCY 18 ELECTRIC

Height [mm]	WIDTH L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
760	480	3581406100230	500	14
1160	480	3581406100231	700	22
1410	480	3581406100232	900	26
1885	480	3581406100233	1200	30

Technical specification of thermostat see Accessories chapter