



# NANCY

## POLISHED STAINLESS STEEL



WARRANTY  
10 YEARS

### MATERIAL:

- Vertical collectors in polished stainless steel  $\varnothing$  30 mm.
- Curved horizontal elements in polished stainless steel  $\varnothing$  18 mm.

### FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.  
The kit is certified from TÜV in compliance with VDI 6036-class 4.

### PACKAGING:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

### FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

### ACCESSORIES:

See Accessories chapter

Functioning:	<input checked="" type="checkbox"/> Hot water	<input type="checkbox"/> Dual energy
--------------	---	--------------------------------------

P. Max: 8 bar	Functioning: hot water	T. Max: 110° C	Connections: 2 x 1/2" gas - 1 x 1/2" gas for airvent
---------------	------------------------	----------------	--

## CERTIFICATIONS




## ACCESSORIES



**Kristal valve square with thermostatic option-chromed**

Copper conn.  $\varnothing$  12/14/15  
Art. nr. 5991990311165

Multilayer conn.  $\varnothing$  16  
Art. nr. 5991990311166




Quotes for square Kristal valves with thermostatic option



**Kristal corner valve with thermostatic option-chromed**

Copper conn.  $\varnothing$  12/14/15  
Art. nr. 5991990301148

Multilayer conn.  $\varnothing$  16  
Art. nr. 5991990301147





Quotes for corner Kristal valves with thermostatic option



**Kit 2 hooks-polished stainless steel**

Art. nr. 5991990010216

Accessories and spare parts - see Accessories chapter

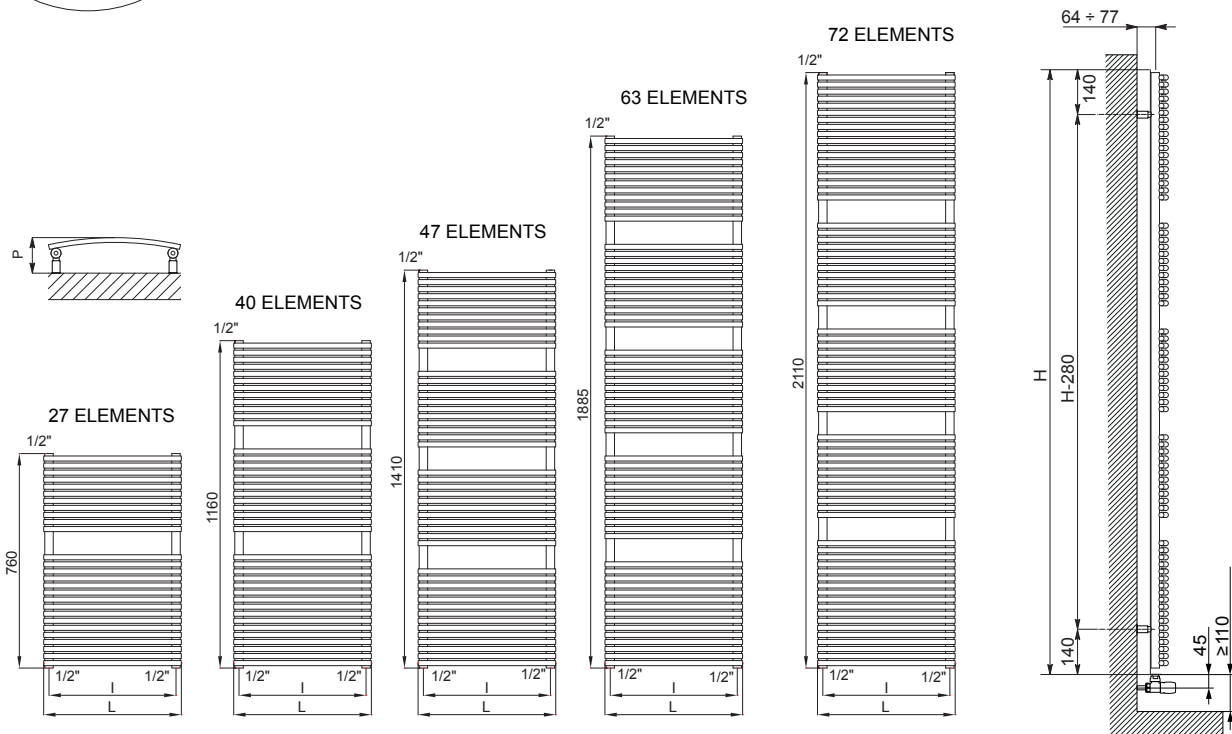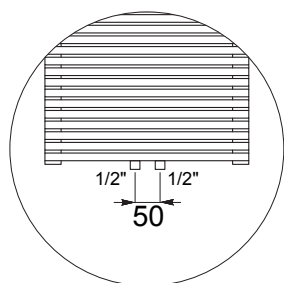

Quotes for Kristal valves

## NANCY POLISHED STAINLESS STEEL

NANCY POLISHED STAINLESS STEEL				Pipe Centres 50 mm		Thermal output [Watt]							Dual energy kit
Height [mm]	WIDTH L [mm]	Pipe Centres I [mm]	Art. nr.	Art. nr.	P [mm]	Dry Weight [Kg]	Surface [m2]	Water content [lt]	Δt=50°C	Δt=30°C	Exp. n	[Watt]	
760	387	350	3551440132050	3551440132064	106 - 116	8,1	0,8	3,6	301	157	1,2729	300	
	488	450	3551440132054	3551440132068	111- 121	9,6	1,0	4,2	396	211	1,2354	400	
1160	387	350	3551440132051	3551440132065	106 - 116	11,2	1,1	5,0	408	213	1,2726	500	
	488	450	3551440132055	3551440132069	111- 121	13,1	1,3	5,7	527	280	1,2386	600	
1410	589	550	3551440132059	3551440132073	118 - 128	15,1	1,6	6,5	646	347	1,2175	700	
	387	350	3551440132052	3551440132066	106 - 116	14,2	1,4	6,4	514	268	1,2724	600	
1885	488	450	3551440132056	3551440132070	111- 121	16,6	1,7	7,3	658	349	1,2419	700	
	589	550	3551440132060	3551440132074	118 - 128	19,1	2,0	8,3	801	429	1,2227	900	
2110	387	350	3551440132053	3551440132067	106 - 116	17,1	1,7	7,8	621	324	1,2722	700	
	488	450	3551440132057	3551440132071	111- 121	20,2	2,1	8,9	789	418	1,2451	900	
2110	589	550	3551440132061	3551440132075	118 - 128	23,1	2,4	10,0	958	512	1,2280	900	
	488	450	3551440132058	3551440132072	111- 121	23,7	2,4	10,5	922	487	1,2483	900	
2110	589	550	3551440132062	3551440132076	118 - 128	27,1	2,8	11,8	1116	594	1,2332	1200	
	793	750	3551440132063	3551440132077	136 - 146	34,1	3,5	14,4	1505	809	1,2150	1200	

For output at different Δt than 50°C, please refer to the following formula: desired output = output at Δt 50°C x (desired Δt/50)<sup>1.4</sup>n