



# NANCY

## SATIN STAINLESS STEEL



WARRANTY  
**10 YEARS**

### MATERIAL:

- Vertical collectors in satin stainless steel  $\varnothing$  30 mm.
- Curved horizontal elements in satin stainless steel  $\varnothing$  18 mm.

### FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.  
The kit is certified from TÜV in compliance with VDI 6036-class 4.

### PACKAGING:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

### FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

### ACCESSORIES:

See Accessories chapter

Functioning:	<input checked="" type="checkbox"/> Hot water	<input type="checkbox"/> Dual energy
--------------	---	--------------------------------------

P. Max: 8 bar	Functioning: hot water	T. Max: 110° C	Connections: 2 x 1/2" gas - 1 x 1/2" gas for airvent
---------------	------------------------	----------------	--

## CERTIFICATIONS




## ACCESSORIES

### Kristal valve square with thermostatic option-satin



Copper conn.  $\varnothing$  12/14/15  
Art. nr. 5991990321143

Multilayer conn.  $\varnothing$  16  
Art. nr. 5991990321144




Quotes for square Kristal valves  
with thermostatic option

### Kristal corner valve with thermostatic option-satin



Copper conn.  $\varnothing$  12/14/15  
Art. nr. 5991990321134

Multilayer conn.  $\varnothing$  16  
Art. nr. 5991990321133





Quotes for corner Kristal valves with  
thermostatic option

### Kit 2 hooks-satin stainless steel



Art. nr. 5991990010217

Accessories and spare parts - see Accessories chapter

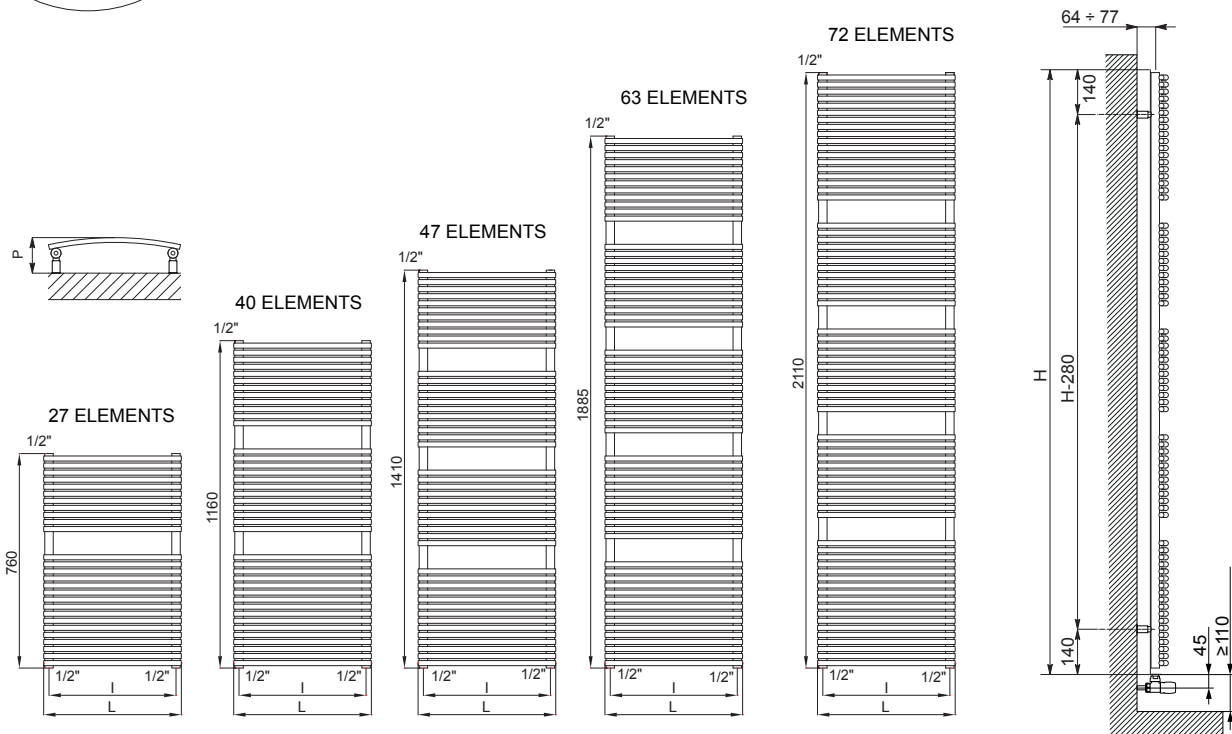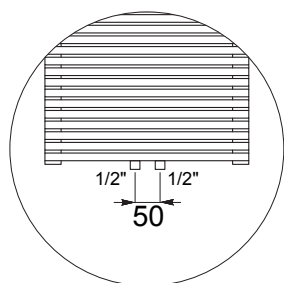

Quotes for Kristal valves

## NANCY SATIN STAINLESS STEEL

NANCY SATIN STAINLESS STEEL				Pipe Centres 50 mm		Thermal output [Watt]						Dual energy kit
Height [mm]	WIDTH L [mm]	Pipe Centres I [mm]	Art. nr.	Art. nr.	P [mm]	Dry Weight [Kg]	Surface [m2]	Water content [lt]	Δt=50°C	Δt=30°C	Exp. n	[Watt]
760	387	350	3551440132550	3551440132564	106 - 116	8,1	0,8	3,6	307	161	1,2644	300
	488	450	3551440132554	3551440132568	111 - 121	9,6	1,0	4,2	405	216	1,2262	500
1160	387	350	3551440132551	3551440132565	106 - 116	11,2	1,1	5,0	418	219	1,2673	500
	488	450	3551440132555	3551440132569	111 - 121	13,1	1,3	5,7	540	287	1,2342	600
	589	550	3551440132559	3551440132573	118 - 128	15,1	1,6	6,5	662	356	1,2138	700
1410	387	350	3551440132552	3551440132566	106 - 116	14,2	1,4	6,4	531	278	1,2702	600
	488	450	3551440132556	3551440132570	111 - 121	16,6	1,7	7,3	677	359	1,2423	700
	589	550	3551440132560	3551440132574	118 - 128	19,1	2,0	8,3	824	441	1,2248	900
1885	387	350	3551440132553	3551440132567	106 - 116	17,1	1,7	7,8	646	337	1,2731	700
	488	450	3551440132557	3551440132571	111 - 121	20,2	2,1	8,9	819	432	1,2530	900
	589	550	3551440132561	3551440132575	118 - 128	23,1	2,4	10,0	992	528	1,2359	1200
2110	488	450	3551440132558	3551440132572	111 - 121	23,7	2,4	10,5	966	508	1,2583	1200
	589	550	3551440132562	3551440132576	118 - 128	27,1	2,8	11,8	1168	618	1,2470	1200
	793	750	3551440132563	3551440132577	136 - 146	34,1	3,5	14,4	1574	838	1,2333	1200

For output at different Δt than 50°C, please refer to the following formula: desired output = output at Δt 50°C x (desired Δt/50)<sup>1.4</sup>n