



STEFANIA

SATIN STAINLESS STEEL



WARRANTY
10 YEARS

MATERIAL:

- Vertical collectors in satin stainless steel \varnothing 30 mm.
- Horizontal elements in satin stainless steel da 30 x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

ACCESSORIES:

See Accessories chapter


Functioning:	<input checked="" type="checkbox"/> Hot water	<input type="checkbox"/> Dual energy
--------------	---	--------------------------------------

P. Max: 8 bar	Functioning: hot water	T. Max: 110° C	Connections: 2 x 1/2" gas - 1 x 1/2" gas for airvent
---------------	------------------------	----------------	--

CERTIFICATIONS




ACCESSORIES



Kristal valve square with thermostatic option-satin

Copper conn. \varnothing 12/14/15
Art. nr. 5991990321143


Multilayer conn. \varnothing 16
Art. nr. 5991990321144



Kristal corner valve with thermostatic option-satin


Copper conn. \varnothing 12/14/15
Art. nr. 5991990321134

Multilayer conn. \varnothing 16
Art. nr. 5991990321133




Kit 2 hooks-satin stainless steel

Art. nr. 5991990010219





Quotes for square Kristal valves with thermostatic option



Quotes for corner Kristal valves with thermostatic option

Accessories and spare parts - see Accessories chapter

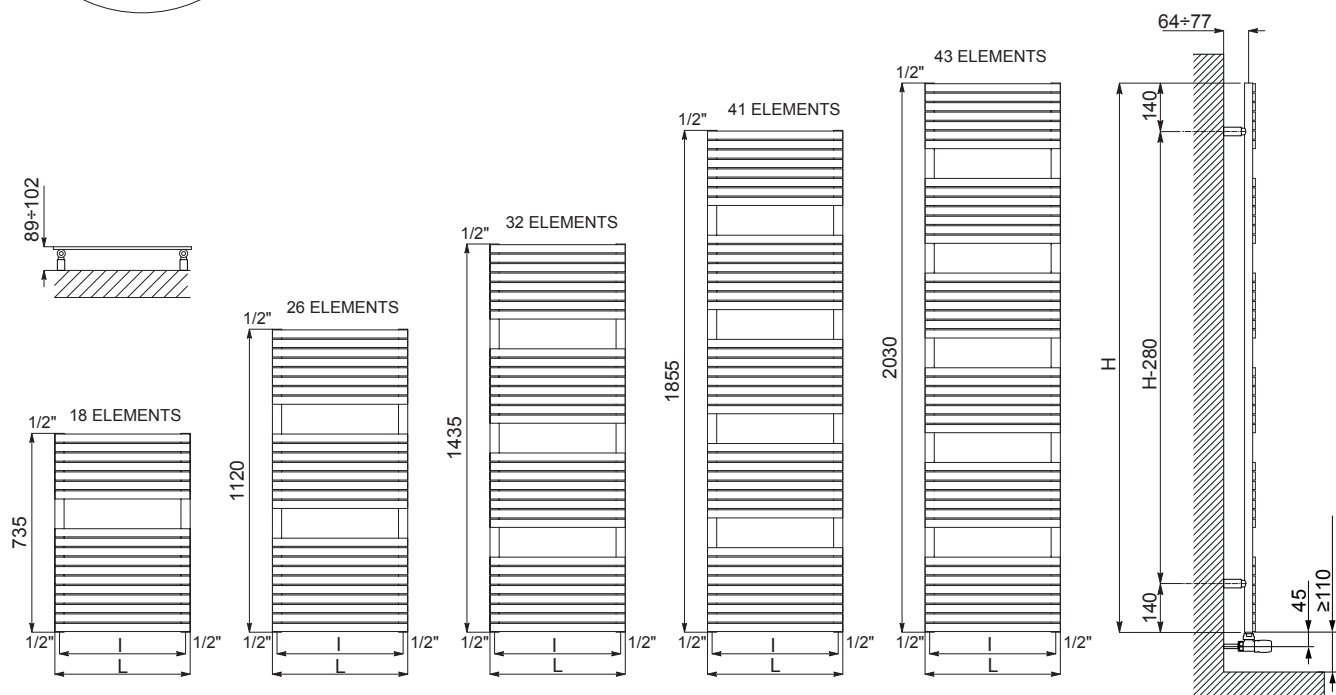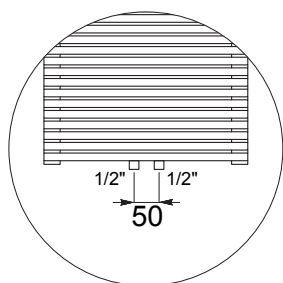

Quotes for Kristal valves

STEFANIA SATIN STAINLESS STEEL

Height [mm]	WIDTH L [mm]	Pipe Centres I [mm]	Art. nr.	Art. nr.	Dry Weight [Kg]	Surface [m2]	Water content [lt]	$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	Exp. n	kit [Watt]
735	400	370	3551610130200	3551610130220	8,0	0,71	2,2	228	123	1,2072	300
	500	470	3551610130204	3551610130224	9,5	0,85	2,5	283	152	1,2128	400
1120	400	370	3551610130201	3551610130221	11,6	1,04	3,2	325	174	1,2285	400
	500	470	3551610130205	3551610130225	13,8	1,25	3,7	399	213	1,2283	500
	600	570	3551610130209	3551610130229	16,0	1,45	4,2	474	253	1,2281	600
1435	400	370	3551610130202	3551610130222	14,4	1,29	4,0	402	213	1,2444	500
	500	470	3551610130206	3551610130226	17,1	1,55	4,6	491	261	1,2398	600
	600	570	3551610130210	3551610130230	19,8	1,80	5,3	579	308	1,2366	700
1855	400	370	3551610130203	3551610130223	18,4	1,66	5,2	529	277	1,2683	700
	500	470	3551610130207	3551610130227	21,9	1,99	6,0	636	335	1,2572	700
	600	570	3551610130211	3551610130231	25,4	2,32	6,8	744	393	1,2493	900
2030	500	470	3551610130208	3551610130228	23,2	2,10	6,4	670	352	1,2611	900
	600	570	3551610130212	3551610130232	26,8	2,44	7,2	782	413	1,2521	900
	800	770	3551610130213	3551610130233	34,2	3,13	8,8	1005	533	1,2401	1200

For output at different Δt than 50°C , please refer to the following formula: desired output = output at $\Delta t 50^{\circ}\text{C} \times (\text{desired } \Delta t/50)^{1,4}$