


VOLANO TERMICO PDC

ENERGY BUFFER FOR HEAT PUMP



PRESSURE	TEMPERATURE
Pmax 4 bar	Tmax -10 / +95 °C

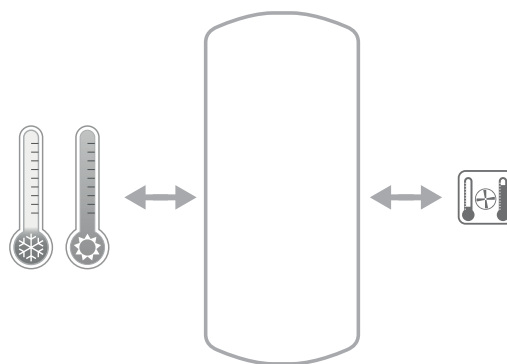

TECHNICAL DESCRIPTION

Buffer either for hot or cold water provided by heat pump, in order to limit the switch on/off of the generator.

MATERIAL

Mild steel

EXTERNAL LINING

PVC plastic grey.


INSULATION

High thermal insulation with ecological polyurethane hard foam.

WARRANTY

2 years

See general sales conditions and warranty.

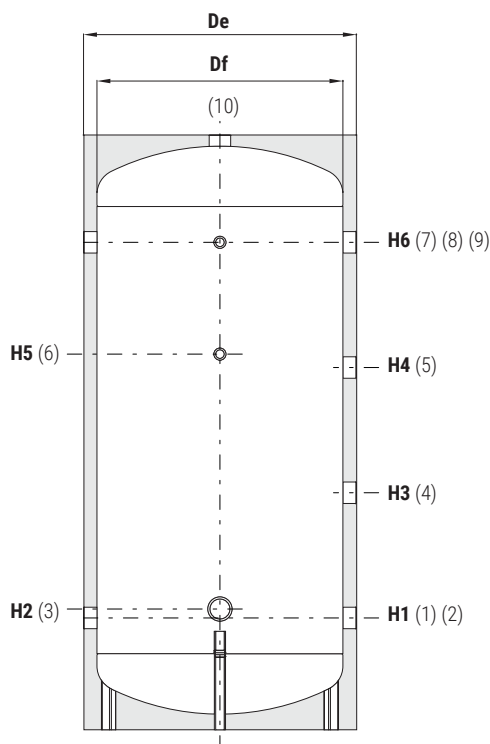


VOLANO TERMICO PDC

ENERGY
EFFICIENCY
CLASS

Model	ENERGY BUFFER FOR HEAT PUMP Art. Nr.	ErP
100	3001162311001	C
200	3001162311002	C
300	3001162311003	C
500	3001162311014	C

- 1-2 From the heat Pump
- 3 Connection for electrical immersion 1"½ Gas F
- 4-5 To the System
- 6 Connection for instrumentation 1/2" Gas F
- 7 To the System
- 8 Connection for instrumentation 1/2" Gas F
- 9 To the System
- 10 To the System 1"¼ Gas F



www.cordivari.com/erp

On line ErP label tool



CORDIVARI Lab

TÜV Rheinland Energie und Umwelt GmbH states that test procedures and Cordivari LAB are certified conforming to European standard EN 15332, as indicated by Ecodesign ErP Directive.



ASK ALWAYS FOR
CERTIFIED LABORATORIES
DATA RESULTS

Model	Volume [litres]	Weight [Kg]	De	H	H1	H2 [mm]	H3	H4	H5	H6	1-2-4-5-7-9 Connections Gas F
100	95	23	461	990	206	246	374	543	511	711	1"
200	180	41	517	1289	206	246	489	793	836	1086	1"
300	280	51	624	1346	256	276	536	816	846	1096	1" ¼
500	478	76	750	1641	271	291	634	998	1091	1361	1" ¼