



Functioning:	<input checked="" type="checkbox"/> HOT WATER	<input checked="" type="checkbox"/> DUAL ENERGY <small>(for dual energy kit see Cordivari Radiators and Towel Rails catalogue)</small>
--------------	---	---

Max pressure: 8 bar	Max temperature: 110 °C	Connections: 2 x 1/2" gas- 1 da 1/2" gas for airvent
---------------------	-------------------------	--

Material:

- Vertical collectors in painted mild steel semi oval 30x40 mm
- Horizontal heating elements in painted mild steel ø 25 mm

Fixing kit:

The fixing kit is in compliance with norm VDI 6036 Class 1-2-3-4 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, Airvent, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

Painting process:

Painted with ecological epoxy powders. (Certificate DIN 55900-1,-2).

Colour:

Pure white RAL 9010

ACCESSORIES

For accessories range see accessories chapter



KRISTAL VALVES -
WHITE COLOUR

For information about Kristal valves, see radiators and towel rails catalogue.



KIT 2 HOOKS WHITE
COLOUR


Art. nr. 5991990310171









TOWEL BAR
WHITE COLOUR
Width= 370 mm

Art. nr. 5991990310170

Applicable only for width ≥ 450 mm



Detail of the 50 mm
Pipe Centres version

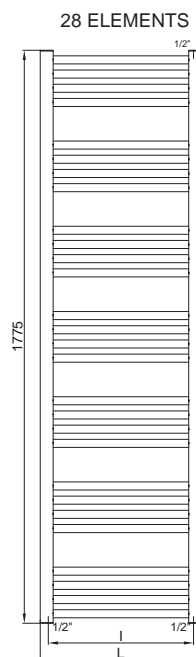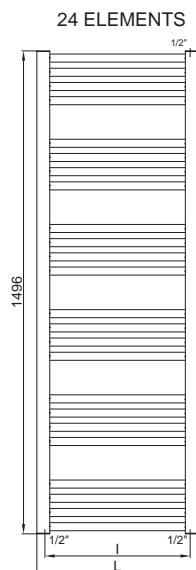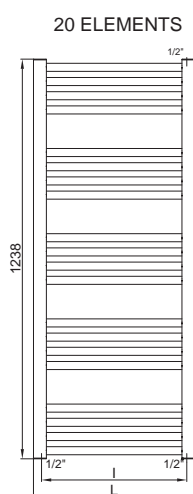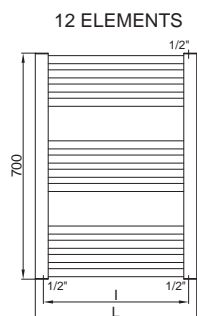

TOWEL RAILS

BELEN

			STANDARD Pipe Centres	Pipe Centres 50 mm	Colour PURE WHITE R01-RAL 9010.					Dual energy kit
Height [mm]	Width L [mm]	Pipe Centres l [mm]	Art. nr.	Art. nr.	Dry weight [kg]	Surface [m ²]	Water content [lt]	Δt=50°C [Watt]	Exponent [n]	[Watt]
700	400	350	3551650000100	3551650000120	3,8	0,479	2,9	258	1,1841	300
	450	400	3551650000101	3551650000121	4,1	0,527	3,2	284	1,18348	300
	500	450	3551650000102	3551650000122	4,4	0,574	3,5	311	1,18286	400
	550	500	3551650000103	3551650000123	4,7	0,621	3,7	337	1,18223	400
	600	550	3551650000104	3551650000124	5,0	0,668	4,0	364	1,18161	400
	750	700	3551650000280	3551650000288	5,9	0,081	4,7	443	1,17974	500
	1000	950	3551650000281	3551650000289	7,3	1,010	6,0	576	1,17663	700
1238	400	350	3551650000105	3551650000125	6,6	0,817	5,0	449	1,21499	500
	450	400	3551650000106	3551650000126	7,1	0,896	5,5	492	1,21408	500
	500	450	3551650000107	3551650000127	7,6	0,974	5,9	534	1,21316	600
	550	500	3551650000108	3551650000128	8,0	1,053	6,3	577	1,21224	600
	600	550	3551650000109	3551650000129	8,5	1,131	6,8	619	1,21133	600
	750	700	3551650000282	3551650000290	9,9	1,366	8,0	747	1,20858	900
	1000	950	3551650000283	3551650000291	12,3	1,700	10,2	959	1,20401	1200
1496	400	350	3551650000110	3551650000130	8,0	0,983	6,1	529	1,21411	600
	450	400	3551650000111	3551650000131	8,5	1,077	6,6	582	1,21208	600
	500	450	3551650000112	3551650000132	9,1	1,172	7,1	635	1,21005	700
	550	500	3551650000113	3551650000133	9,7	1,266	7,6	689	1,20803	700
	600	550	3551650000114	3551650000134	10,3	1,36	8,1	742	1,206	700
	750	700	3551650000284	3551650000292	12,0	1,642	9,7	902	1,19991	900
	1000	950	3551650000285	3551650000293	14,7	2,040	12,3	1168	1,18977	1200
1775	400	350	3551650000115	3551650000135	9,4	1,155	7,1	633	1,21897	700
	450	400	3551650000116	3551650000136	10,0	1,265	7,7	696	1,21668	700
	500	450	3551650000117	3551650000137	10,7	1,374	8,3	758	1,21439	900
	550	500	3551650000118	3551650000138	11,4	1,484	8,9	820	1,2121	900
	600	550	3551650000119	3551650000139	12,1	1,594	9,5	883	1,20981	900
	750	700	3551650000286	3551650000294	14,051	1,923	11,3	1070	1,20294	1200
	1000	950	3551650000287	3551650000295	17,24	2,390	14,3	1382	1,19148	1200

For output at different Δt than 50°C, please refer to the following formula: **desired output = output at Δt 50°C x (desired Δt/50)ⁿ**

PROMOTION PACKAGES (STANDARD PIPE CENTRES)

Height [mm]	Width [mm]	Art. nr.	Art. nr.
700	500	355165000010205	355165000010210
1238	450	355165000010605	355165000010610
1238	500	355165000010705	355165000010710
1238	550	355165000010805	355165000010810

Height [mm]	Width [mm]	Art. nr.	Art. nr.
1496	450	355165000011105	355165000011110
1496	500	355165000011205	355165000011210
1496	550	355165000011305	355165000011310
1775	500	355165000011705	355165000011710
1775	550	355165000011805	355165000011810
1775	600	355165000011905	355165000011910