

# BELEN CHROMED



Functioning:	<input checked="" type="checkbox"/> <b>HOT WATER</b>	<input checked="" type="checkbox"/> <b>DUAL ENERGY</b> <small>(for dual energy kit see Cordivari Radiators and Towel Rails catalogue)</small>
--------------	--	--

<b>Max pressure:</b> 8 bar	<b>Max temperature:</b> 110 °C	<b>Connections:</b> 2 x 1/2" gas- 1 da 1/2" gas for airvent
----------------------------	--------------------------------	---

## Material:

- Vertical collectors in mild steel semi oval 30x40 mm
- Horizontal heating elements in mild steel ø 25 mm

## Fixing kit:

The fixing kit is in compliance with norm VDI 6036 Class 1-2-3-4 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, Airvent, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



## Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

## Finishing:

Chrome (PLATED IN ITALY)

## ACCESSORIES

*For accessories range see accessories chapter*



CHROMED VALVE  
KIT



KIT 2 HOOKS  
CHROMED




TOWEL BAR  
CHROMED  
Width= 370 mm

For information about Kristal valves, see radiators and towel rails catalogue.







Art. nr. 5991990310303

Art. nr. 5991990310302

Applicable only for width ≥ 450 mm



Detail of the 50 mm  
Pipe Centres version

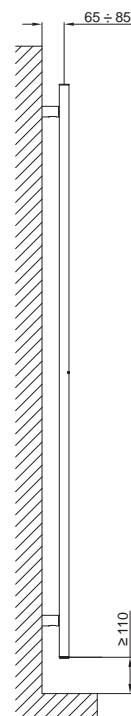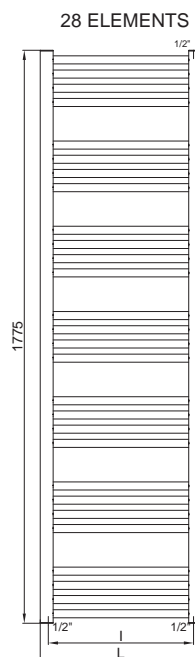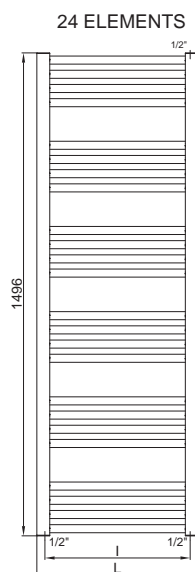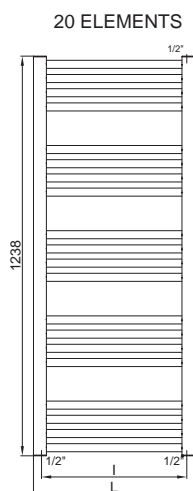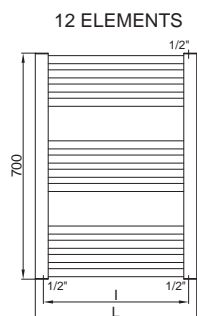

TOWEL RAILS

## BELEN CHROMED

				Pipe Centres 50 mm							Dual energy kit
Height [mm]	Width L [mm]	Pipe Centres l [mm]	Art. nr.	Art. nr.	Dry weight [kg]	Surface [m <sup>2</sup> ]	Water content [lt]	Δt=50°C [Watt]	Exponent [n]		[Watt]
700	400	350	3551650001100	3551650001120	3,8	0,479	2,9	173	1,1841		300
	450	400	3551650001101	3551650001121	4,1	0,527	3,2	190	1,18348		300
	500	450	3551650001102	3551650001122	4,4	0,574	3,5	208	1,18286		300
	550	500	3551650001103	3551650001123	4,7	0,621	3,7	226	1,18223		300
	600	550	3551650001104	3551650001124	5,0	0,668	4,0	244	1,18161		300
1238	400	350	3551650001105	3551650001125	6,6	0,817	5,0	301	1,21499		400
	450	400	3551650001106	3551650001126	7,1	0,896	5,5	330	1,21408		400
	500	450	3551650001107	3551650001127	7,6	0,974	5,9	358	1,21316		400
	550	500	3551650001108	3551650001128	8,0	1,053	6,3	387	1,21224		500
	600	550	3551650001109	3551650001129	8,5	1,131	6,8	415	1,21133		500
1496	400	350	3551650001110	3551650001130	8,0	0,983	6,1	354	1,21411		400
	450	400	3551650001111	3551650001131	8,5	1,077	6,6	390	1,21208		500
	500	450	3551650001112	3551650001132	9,1	1,172	7,1	425	1,21005		500
	550	500	3551650001113	3551650001133	9,7	1,266	7,6	462	1,20803		600
	600	550	3551650001114	3551650001134	10,3	1,36	8,1	497	1,206		600
1775	400	350	3551650001115	3551650001135	9,4	1,155	7,1	424	1,21897		500
	450	400	3551650001116	3551650001136	10,0	1,265	7,7	466	1,21668		600
	500	450	3551650001117	3551650001137	10,7	1,374	8,3	508	1,21439		600
	550	500	3551650001118	3551650001138	11,4	1,484	8,9	549	1,2121		700
	600	550	3551650001119	3551650001139	12,1	1,594	9,5	592	1,20981		700

For output at different Δt than 50°C, please refer to the following formula: **desired output = output at Δt 50°C x (desired Δt/50)<sup>n</sup>**