

LISA[®] 25

CURVED CHROMED



Functioning:	<input checked="" type="checkbox"/> HOT WATER	<input checked="" type="checkbox"/> DUAL ENERGY <small>(for dual energy kit see Cordivari Radiators and Towel Rails catalogue)</small>
--------------	--	--

Max pressure: 8 bar	Max temperature: 110 °C	Connections: 2 x 1/2" gas- 1 da 1/2" gas for airvent
----------------------------	--------------------------------	---

Material:

- Vertical collectors in mild steel semi oval 30x40 mm.
- Curved horizontal heating elements in mild steel ø 25 mm.

Fixing kit:

The fixing kit is in compliance with norm VDI 6036 Class 1-2-3-4 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, Airvent, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

Finishing:

Chrome (PLATED IN ITALY)

ACCESSORIES

For accessories range see accessories chapter



CHROMED VALVE
KIT



KIT 2 HOOKS
CHROMED




MY WAY[®]
SYSTEM



For information about Kristal valves, see radiators and towel rails catalogue.

Art. nr. 5991990310303

For information see radiators and towel rails catalogue



Detail of the 50 mm
Pipe Centres version

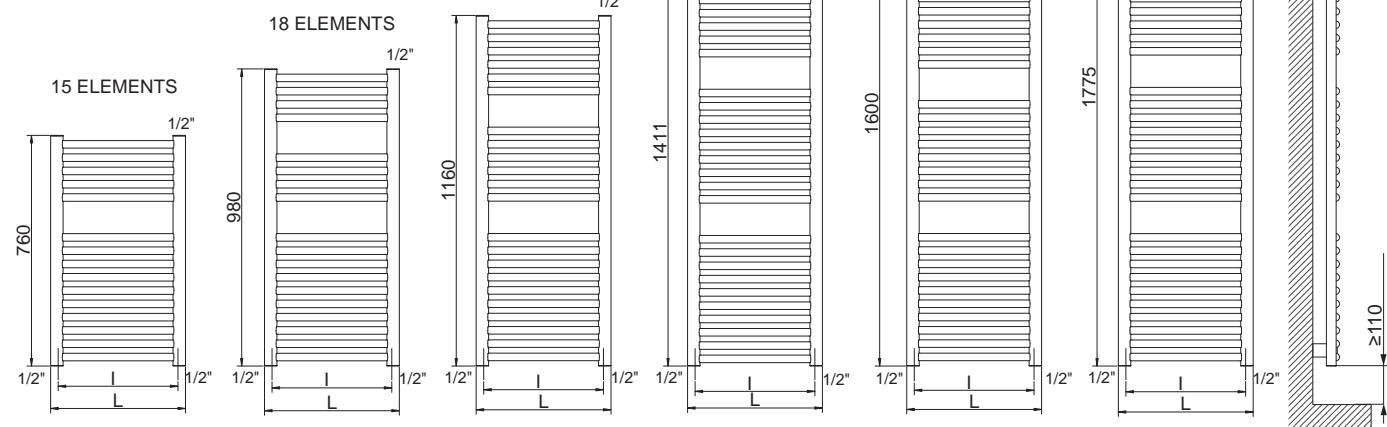

TOWEL RAILS

LISA® 25 CURVED CHROMED

PIPE CENTRES 50 MM

Height [mm]	Width L [mm]	Pipe Centres I [mm]	Art. nr.	Art. nr.	Dry weight [kg]	Surface [m ²]	Water content [lt]	Δt=50°C [Watt]	Exponent [n]	Dual energy kit [Watt]
760	450	400	3551586110302	3551586110352	5,6	0,62	3,7	232	1,2235	--
	500	450	3551586110303	3551586110353	6,0	0,68	4,0	254	1,2218	300
	550	500	3551586110304	3551586110354	6,4	0,74	4,3	275	1,2204	300
	600	550	3551586110305	3551586110355	6,9	0,80	4,6	296	1,2192	300
980	450	400	3551586110309	3551586110359	6,8	0,77	4,6	285	1,2116	300
	500	450	3551586110310	3551586110360	7,4	0,84	4,9	313	1,2156	300
	550	500	3551586110311	3551586110361	7,9	0,91	5,3	340	1,2133	400
	600	550	3551586110312	3551586110362	8,4	0,98	5,7	367	1,2087	400
1160	450	400	3551586110316	3551586110366	8,2	0,93	5,5	330	1,2448	400
	500	450	3551586110317	3551586110367	8,9	1,02	6,0	362	1,2427	400
	550	500	3551586110318	3551586110368	9,5	1,10	6,4	394	1,2410	400
	600	550	3551586110319	3551586110369	10,2	1,19	6,9	426	1,2378	500
1411	450	400	3551586110323	3551586110373	10,2	1,69	6,9	397	1,2666	500
	500	450	3551586110324	3551586110374	11,1	1,27	7,5	436	1,2595	500
	550	500	3551586110325	3551586110375	11,9	1,38	8,1	475	1,2592	600
	600	550	3551586110326	3551586110376	12,7	1,49	8,6	513	1,2537	600
1600	450	400	3551586110330	3551586110380	11,2	1,27	7,6	451	1,2699	500
	500	450	3551586110331	3551586110381	12,1	1,39	8,2	495	1,2660	600
	550	500	3551586110332	3551586110382	13,0	1,51	8,8	539	1,2628	600
	600	550	3551586110333	3551586110383	13,9	1,63	9,4	582	1,2600	700
1775	450	400	3551586110337	3551586110387	12,6	1,43	8,5	505	1,2209	600
	500	450	3551586110338	3551586110388	13,6	1,57	9,2	553	1,2128	600
	550	500	3551586110339	3551586110389	14,6	1,71	9,9	601	1,2107	700
	600	550	3551586110340	3551586110390	15,6	1,83	10,6	649	1,2089	700

For output at different Δt than 50°C, please refer to the following formula: **desired output = output at Δt 50°C x (desired Δt/50)ⁿ**