

LISA® 22

ELECTRIC



ELECTRICAL ONLY:	<input checked="" type="checkbox"/> WITH DIGITAL THERMOSTAT	Seasonal energy efficiency η_s : 38%
------------------	---	---

Electrical resistors: Class 1	Minimum class protection: IP 44	Wire lenght: 1200 mm with Schuko plug
-------------------------------	---------------------------------	---------------------------------------

Material:

- Vertical collectors in painted mild steel semi oval 30x40 mm.
- Horizontal heating elements in painted mild steel \varnothing 22 mm.
- Glycolate water.

Fixing kit:

The fixing kit is in compliance with norm VDI 6036 Class 1-2-3-4 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

Painting process:

Painted with ecological epoxy powders. (Certificate DIN 55900-1,-2).

Colour:

Pure white RAL 9010

Electrical resistors:

Electrical resistors with white digital thermostat- Class 1- IP44. Manual operation and Boost option (2 hours)

ACCESSORIES



KIT 2 HOOKS WHITE
COLOUR



Art. nr. 5991990310171



TOWEL BAR
WHITE COLOUR
Width= 370 mm

Art. nr. 5991990310170

Applicable only for width \geq 450 mm

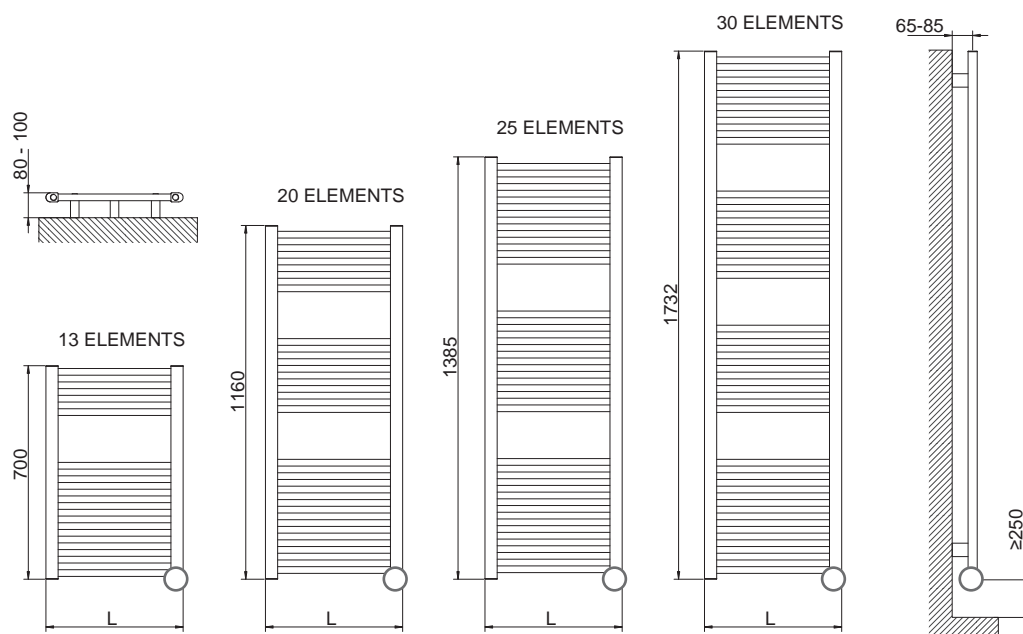

The general footprint has to be calculated considering the thermostat height

LISA® 22 ELECTRIC - WITH DIGITAL THERMOSTAT

Colour PURE WHITE R01-RAL 9010.

Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
700	400	3581646100050	300	7,4
	500	3581646100051	400	8,4
1160	400	3581646100052	400	11,2
	450	3581646100053	500	11,9
1385	500	3581646100054	600	12,7
	400	3581646100055	500	13,4
1732	500	3581646100056	700	15,3
	500	3581646100057	900	18,4



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage.

The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.

HOW TO PLACE ELECTRIC RADIATORS

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.

