

R-Mix DN25 MODULES

CIRCULATION AND MIXED PUMPS MODULES FOR CENTRAL HEATING INSTALLATION



APPLICATION

Heating water circulator and mixer for central heating installation

MATERIAL

Circuitry, fittings and valves in brass material
Case in PPE, for protecting and insulating the module
Material used for components and accessories suitable for drinkable water according DM 174 dated 06.04.04 and Sect. 9 D.I. 31/2001.

TECHNICAL INFORMATION

R-Mix module are modules designed for the circulation of heating water in closed central heating installations.
The Mixed Unit version of Module DN25 meets all the installation needs with specific models: middle and low temperature heating systems, need of energy metering, cooling systems; everything

with the possibility of a management control by means of climatic controllers even built-in the pump unit.


The Module DN25 equipped with mixing valves, allows an easier installation and relevant using.

By setting the required temperature of heating water on the thermostatic mixing valve, the same will be delivered accordingly to the central heating installation in an automatic and constant way.

WARRANTY

2 years warranty (1 year for electronic components)

See general conditions for sales and warranty terms.

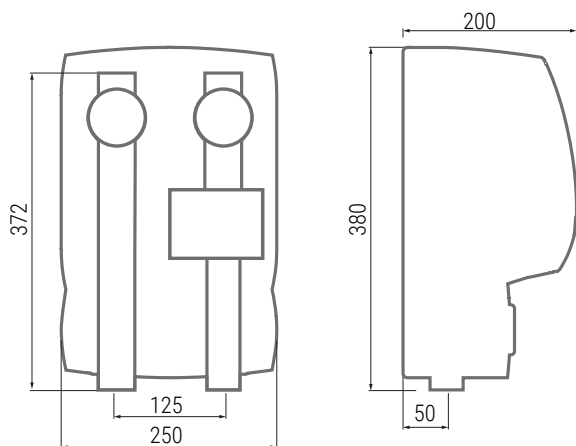

R-MIX DN25

| Model | ART. NR. |
|----------------------------------|---------------|
| UNMIXED UNIT | 3435316700021 |
| MIXED UNIT (20-45 °C) | 3435316700022 |
| MIXED UNIT (45-70 °C) | 3435316700023 |




UNMIXED UNIT



MIXED UNIT

| Model | Connections | Pump Head [mH ₂ O] | Max Output [kW] | Max flow rate [l/h] | Kvs |
|---------------------------|-------------|----------------------------------|--------------------|------------------------|-----|
| Unmixed Unit | 1" | 6 | 50 | 2150 | 8.0 |
| With mixing valve 20-45°C | 1" | 7.5 | 35 | 1500 | 3.3 |
| With mixing valve 45-70°C | 1" | 7.5 | 35 | 1500 | 3.3 |

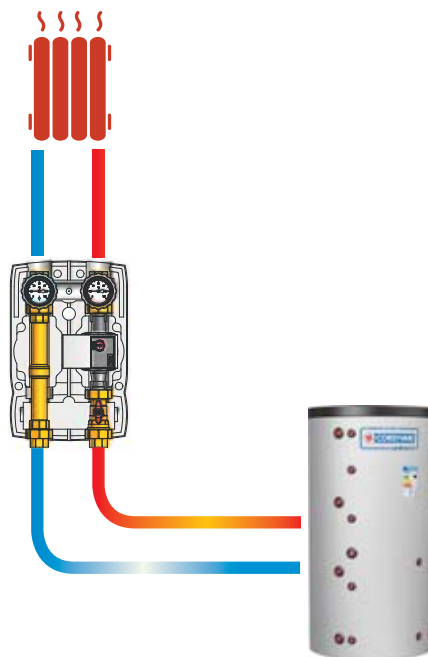

Accessories on request

