



# KELLY FLAT SX<sup>ELECTRIC</sup>



## MATERIAL:

- Vertical collectors in painted mild steel  $\varnothing$  38 mm.
- Horizontal heating elements in painted mild steel 50x10 mm.
- Glycolate water.

## FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4. hollow brick walls, user notice.

## PACKAGING:

The radiator is protected by recyclable carton box. User notice included.

## PAINTING PROCESS:

Painted with ecological epoxy powders. (Certificate DIN 55900-1,-2)

## COLOURS:

Radiator and accessories: standard white colour RAL 9010-R01.  
For other colours see Colour chart chapter.

## ACCESSORIES:

See Accessories chapter

Electrical only:	<input checked="" type="checkbox"/> With PLUS digital thermostat (800 mm wire lenght - with Schuko plug)	<input checked="" type="checkbox"/> With ECO digital thermostat (1200 mm wire lenght - with Schuko plug)
------------------	--	--


Class protection: CLASS 1	Minimum ingress protection: IP 44	Power supply: 230 V - 50 Hz
---------------------------	-----------------------------------	-----------------------------

Seasonal energy efficiency $\eta_s$ : 39% with PLUS digital thermostat	Seasonal energy efficiency $\eta_s$ : 38% with ECO digital thermostat
--	---

## CERTIFICATIONS



## HOW TO PLACE ELECTRIC RADIATORS

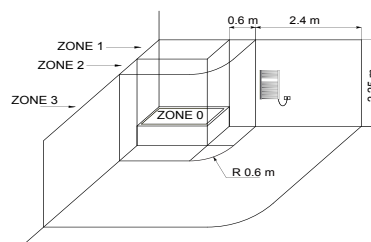

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating ( $\eta_s$ ) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage.

The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.



Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.

## INCLUDED



Remote control of PLUS  
digital chrono-thermostat

Remote control of PLUS  
digital chrono-thermostat  
functioning

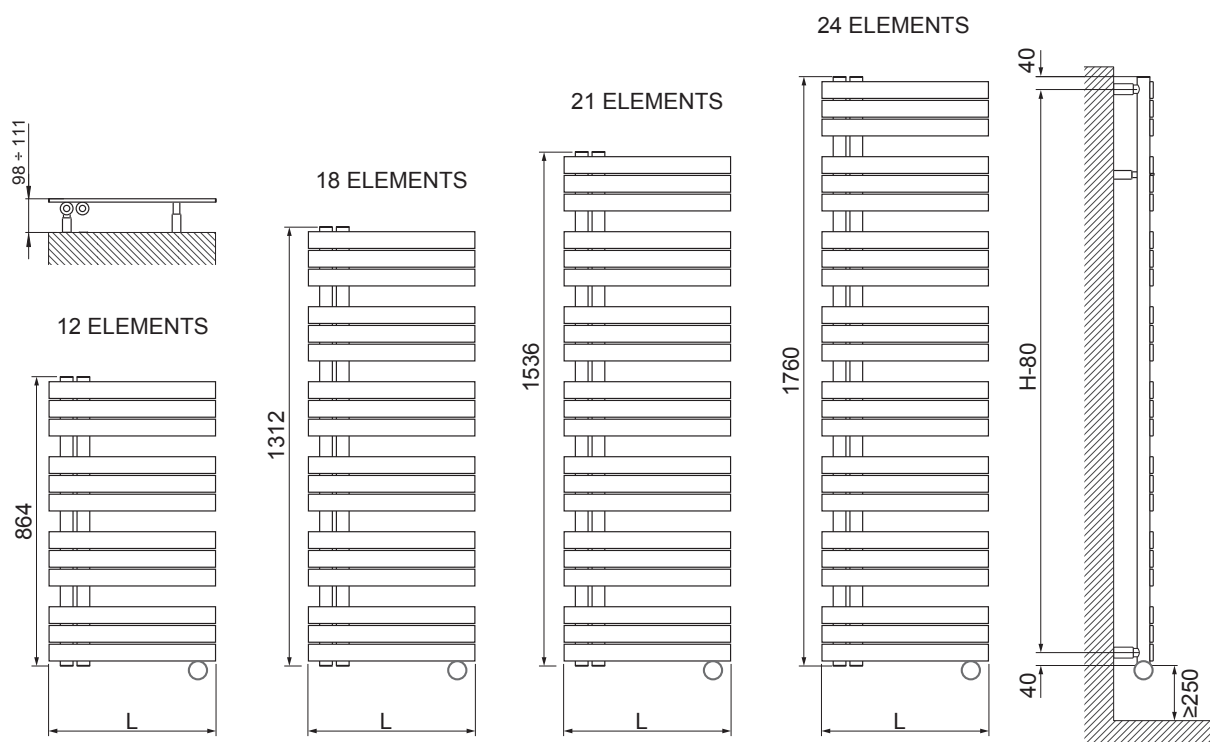


The general footprint has to be calculated considering the thermostat height

### KELLY FLAT SX<sup>ELECTRIC</sup> (remote control included)

Height [mm]	WIDTH L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
<b>864</b>	500	3581726100198	500	13
	600	3581726100199	600	15
<b>1312</b>	500	3581726100200	700	19
<b>1536</b>	500	3581726100202	900	23
<b>1760</b>	600	3581726100205	1200	26

Technical specification of thermostat see Accessories chapter



The general footprint has to be calculated considering the thermostat height

### KELLY FLAT SX<sup>ELECTRIC</sup>

Height [mm]	WIDTH L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
<b>864</b>	500	3581726100181	500	13
	600	3581726100182	600	15
<b>1312</b>	500	3581726100183	700	19
<b>1536</b>	500	3581726100185	900	23
<b>1760</b>	600	3581726100188	1200	26

Technical specification of thermostat see Accessories chapter

Art. nr. and price are referred to colour WHITE R01 - RAL 9010 version.