

LISA 2 BLOWER



ELECTRICAL ONLY:

With BLOWER electric module for the ventilated function

Seasonal energy efficiency η_s : 40%

Electrical resistors: Class 2

Minimum class protection: IP 24

Wire length: 800 mm with Schuko plug

Material:

- Vertical collectors in painted mild steel semi oval 30 x 40 mm.
- Horizontal heating elements in painted mild steel ϕ 22 mm.
- Glycolate water.

Electric module for ventilated function:

Power 1000 Watt - 230 V 50 Hz • On / Off Switch • Temperature settings: +10°C to + 30°C

Fixing kit:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

Packing:

The radiator is packed in a recycled cardboard box. User notice included.

Painting process:

Painted with ecological epoxy powders. (Certificate DIN 55900-1,-2).

Colours:

Standard colour pure white RAL 9010

Accessories:

See Accessories



ACCESSORIES



WIRELESS REMOTE CONTROL
Width= 370 mm

Art. nr. 5150990000011

Remote control of "BLOWER" ventilated functioning



KIT 2 HOOKS WHITE COLOUR


Art. nr. 5991990310171



TOWEL BAR WHITE COLOUR
Width= 370 mm

Art. nr. 5991990310170

Applicable only for width \geq 450 mm

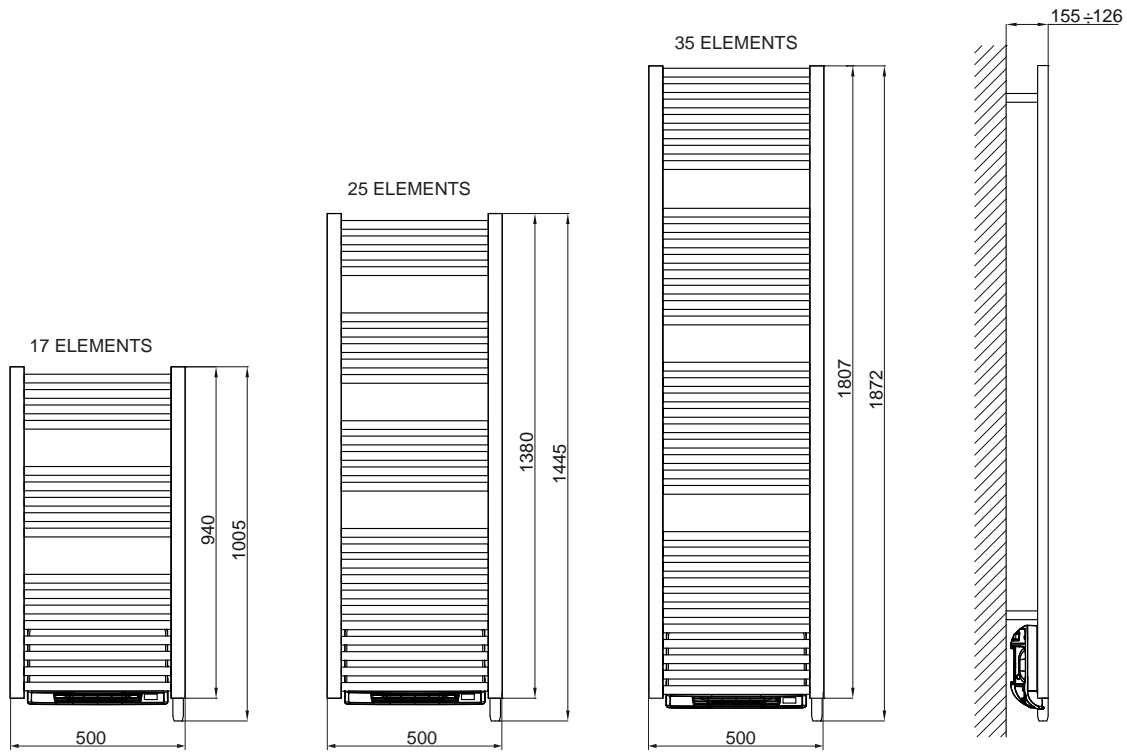

LISA® 2 BLOWER

Colour PURE WHITE R01-RAL 9010.

Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Output BLOWER [Watt]	Weight [Kg]
940	500	3581586100153	500	1000	8,4
1380	500	3581586100154	750	1000	11,0
1807	500	3581586100155	1000	1000	16,1



ELECTRIC MODULE FOR THE VENTILATED FUNCTION:

- Excellent ergonomic settings
- "Smart" electronic control: this means stable and accurate temperature in the bathroom all year round
- Energy Saving Pack
- Super comfort feature (automatic Boost): additional instantaneous heating, the hot air blower allows automatic and fast room temperature increase, after an Eco, Frost protection or Standby period
- Minimal thickness behind the towel rail
- Active memory: clock and settings are saved by EEPROM in case the mains power supply goes off



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage.

The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.

HOW TO PLACE ELECTRIC RADIATORS

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.

