



CLAUDIA® BLOWER DUAL ENERGY



**EUROPEAN
WARRANTY**

MATERIAL:

- Vertical collectors in painted mild steel semi oval 30x40 mm.
- Horizontal heating elements in painted mild steel ø 25 mm.

ELECTRIC MODULE FOR VENTILATED FUNCTION:

Fan heater with integrated PID electronic controller; with presence / absence detector, Open window detector; self-learning and self-programming function optimized with priority on comfort or energy saving.

Power 1000 Watt - 230 V 50 Hz • On / Off Switch • Temperature settings: +10°C to + 30°C.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

PACKAGING:

The radiator is protected by recyclable carton box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLOURS:

See colour chart.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

FUNCTIONING:

- Electric
- With BLOWER electric module
- Blower dual energy

P. Max: 8 bar

T. Max: 110° C

Connections: n° 2 x 1/2" G - 1 x 1/2" G


Minimum ingress protection: IP 24

Wire length: 1100 mm with Schuko plug

CERTIFICATES



HOW TO PLACE ELECTRIC RADIATORS

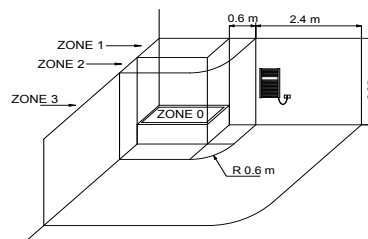

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%. Each of the ErP electric radiator is equipped with at least electronic temperature control, window opening detection and weekly programmer.

OPTIONAL

RF WIRELESS REMOTE CONTROL




Remote control of "BLOWER" ventilated functioning

Art. nr. 5150990000011

ACCESSORIES

Kit 2 hooks white R01



Art. nr. 5991990310028






Towel bar painted mild steel white R01



Width	Art. nr.	Available on width
276 mm	5991990310047	≥ 400 mm
368 mm	5991990310029	≥ 500 mm

If ordered separately from the radiator, the accessories are available in standard white only

Art. nr. are referred to colour WHITE R01

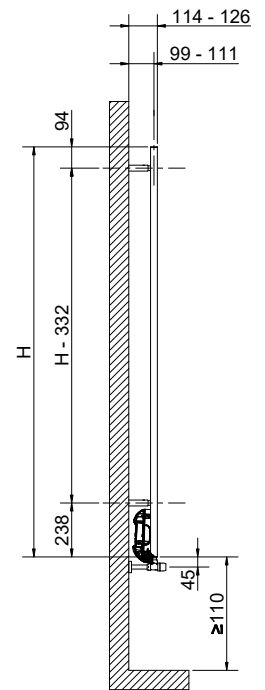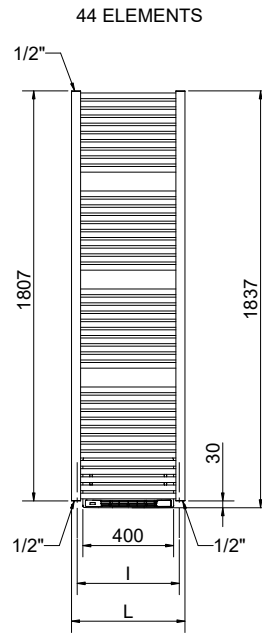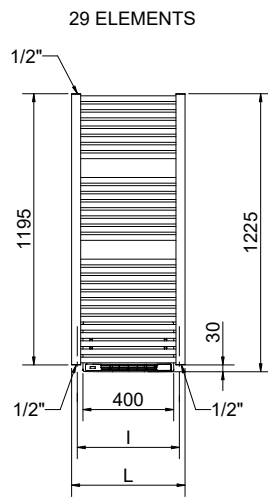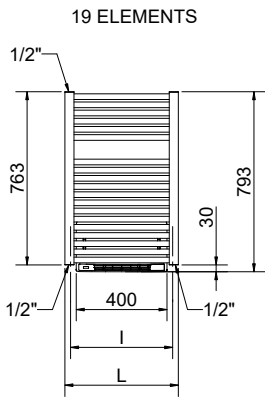

(*) Pipe center (I) measure of the fixing kit

CLAUDIA® BLOWER DUAL ENERGY

Height [mm]	Width L [mm]	Pipe centres I [mm]	Art. nr.	Dry Weight [Kg]	Surface [m ²]	Water content [lt]	Thermal output [Watt]		Exp. n	BLOWER output [Watt]
							Δt=50°C	Δt=30°C		
763	500	450	3581356100170	10,1	0,821	4,8	389	206	1,2472	1000
1195	500	450	3581356100171	13,4	1,26	7,4	595	314	1,2488	1000
1807	500	450	3581356100172	18,1	1,91	11,3	907	479	1,2513	1000

Art. nr. are referred to colour WHITE R01

For output at different ΔT, please refer to the following formula: desired output = output at Δt 50°C x (desired Δt/50)ⁿ.