



DORY ELECTRIC



**EUROPEAN
WARRANTY**

MATERIAL:

- Vertical collectors in painted mild steel \varnothing 30 mm.
- Horizontal heating elements in painted mild steel 50x10 mm.
- Heat transfer fluid.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

PACKAGING:

The radiator is protected by recyclable carton box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLOURS:

See colour chart.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

ELECTRICAL ONLY:

- With WiFi digital thermostat
- With PLUS digital thermostat
- With ECO digital thermostat

Class protection: CLASS 1

Minimum ingress protection: IP 44

Wire length: 1200 mm with Schuko plug (with WiFi or ECO digital thermostat)

Wire length: 800 mm with Schuko plug (with PLUS digital thermostat)

Power supply: 230Vac 50Hz (with WiFi or PLUS digital thermostat)

Power supply: 230Vac 50/60Hz (with ECO digital thermostat)


Seasonal energy efficiency η_s : 39% (with WiFi digital thermostat)

Seasonal energy efficiency η_s : 38% (with PLUS or ECO digital thermostat)

CERTIFICATES



HOW TO PLACE ELECTRIC RADIATORS

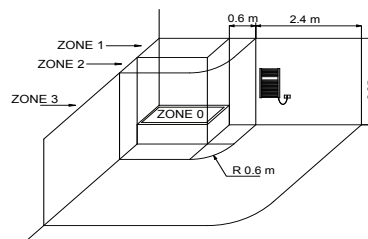

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%. Each of the ErP electric radiator is equipped with at least electronic temperature control, window opening detection and weekly programmer.

INCLUDED



Remote control of PLUS digital chrono-thermostat

Remote control of PLUS digital chrono-thermostat functioning

ACCESSORIES



Kit 2 hooks white R01

Art. nr. 5991990310389









Towel bar painted mild steel white R01

Art. nr. 5991990331127


If ordered separately from the radiator, the accessories are available in standard white only

Art. nr. are referred to colour WHITE R01

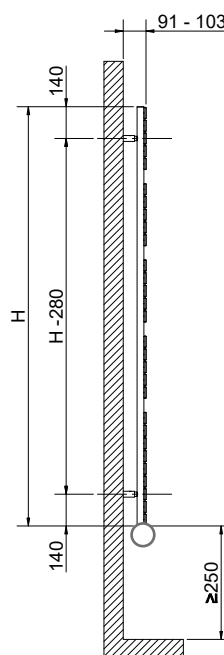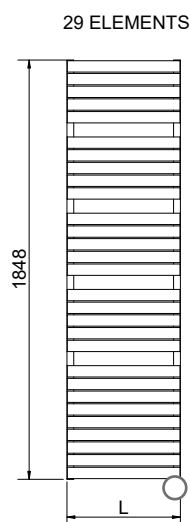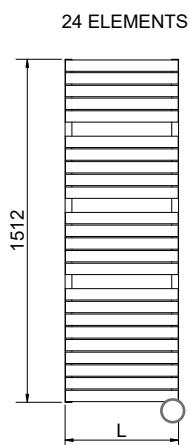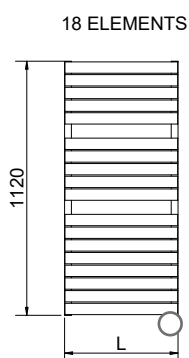

(*) Pipe center (l) measure of the fixing kit

○ The general footprint has to be calculated considering the thermostat height




DORY ELECTRIC WIFI

NEW


Height [mm]	Width L [mm]	Fixing kit center distance l (*)	Art. nr.	Output [Watt]	Weight [Kg]
784	500	470	3581426100329	500	15
1120	500	470	3581426100330	700	21
1512	500	470	3581426100331	900	28
1848	600	570	3581426100332	1200	38

PRODUCT AVAILABLE FROM APRIL 2022



DORY ELECTRIC PLUS (remote control included)

Height [mm]	Width L [mm]	Fixing kit center distance l (*)	Art. nr.	Output [Watt]	Weight [Kg]
784	500	470	3581426100640	500	15
1120	500	470	3581426100641	700	21
1512	500	470	3581426100642	900	28
1848	600	570	3581426100643	1200	38



DORY ELECTRIC ECO

Height [mm]	Width L [mm]	Fixing kit center distance l (*)	Art. nr.	Thermal output [Watt]	Weight [Kg]
784	500	470	3581426100301	500	15
1120	500	470	3581426100302	700	21
1512	500	470	3581426100303	900	28
1848	600	570	3581426100304	1200	38

Art. nr. are referred to colour WHITE R01