



GLORIA 22 ELECTRIC



MATERIAL:

- Vertical collectors in painted mild steel \varnothing 30 mm.
- Horizontal heating elements in painted mild steel \varnothing 22 mm.
- Glycolate water.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4. hollow brick walls, user notice.

PACKAGING:

The radiator is protected by recyclable carton box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders. (Certificate DIN 55900-1,-2)

COLOURS:

Radiator and accessories: standard white colour RAL 9010-R01.
For other colours see Colour chart chapter.

ACCESSORIES:

See Accessories chapter

Electrical only:	<input checked="" type="checkbox"/> With ECO digital thermostat (1200 mm wire lenght with Schuko plug)
------------------	--


Class protection: CLASS 1	Minimum ingress protection: IP 44	Power supply: 230 V - 50 Hz
---------------------------	-----------------------------------	-----------------------------

Seasonal energy efficiency η_s : 38% with ECO digital thermostat

CERTIFICATIONS



HOW TO PLACE ELECTRIC RADIATORS

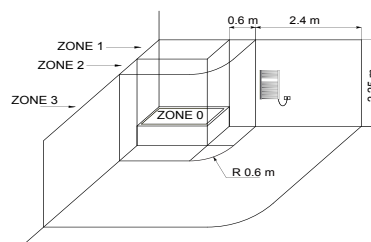

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.




All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.


The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage.

The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.


Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.




16 ELEMENTS

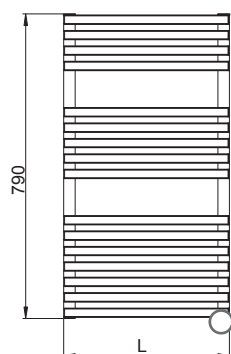




23 ELEMENTS

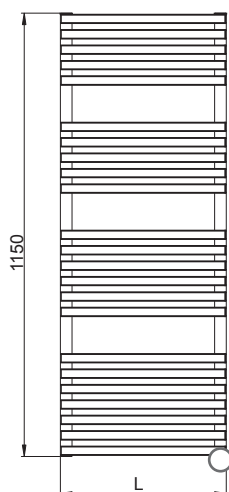

30 ELEMENTS

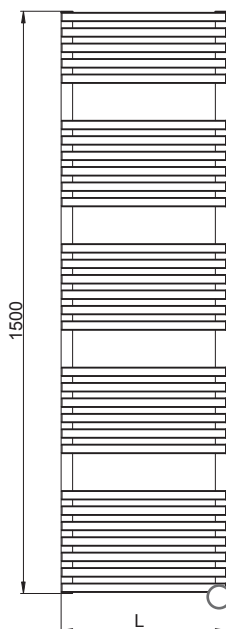

34 ELEMENTS

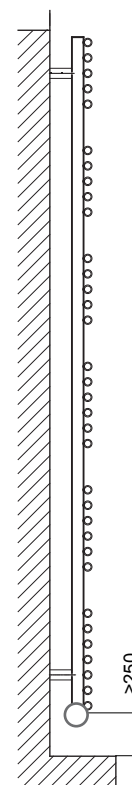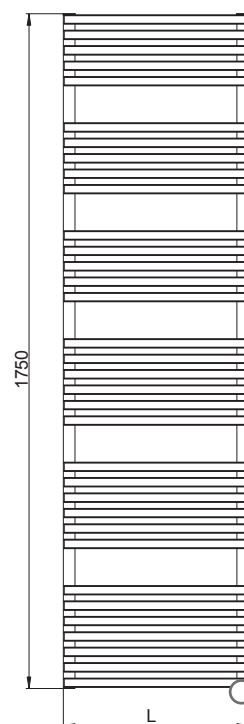

The general footprint has to be calculated considering the thermostat height

GLORIA 22 ELECTRIC

Height [mm]	WIDTH L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
790	430	3581666100011	400	10
1150	580	3581666100012	700	17
1500	580	3581666100013	900	22
1750	580	3581666100014	1200	25

Technical specification of thermostat see Accessories chapter

Art. nr. and price are referred to colour WHITE R01 - RAL 9010 version.